

## DATA SHEET

### **EVO Ø120** **5.500 lumen**

STAINLESS STEEL AISI 316L  
ALUMINIUM 6082  
AB2 ON REQUEST

Evo 120 INC is the underwater light for thru-hull applications, with a section measuring up to 90 mm.

The light contains a state-of-the-art 6000 Lumen Power Led, with the possibility to choose from 2 different light beams.

The Sea Led Evolution Series is the upgrade of the line of underwater lights by the Cantalupi Group. It's designed to achieve first-class lighting performance and to ensure the safety of the boat.

It can be disassembled from the inside to replace the lighting core.




#### **LIGHT TECHNICAL DATA**

Power	50W
Current / Amp draw	1.4 A @ 35 Vdc
Fixture Lumens	5500 @ 45°
CCT	5700 K
Beam Angle (degrees)	medium 60° / narrow 45°
Power Supply	Available @ 110-220VAC or 24VDC
Dimming	DALI, DMX, MODBUS, (0-10)

#### **FEATURES**

Width dimensions	Ø 120 mm / 4.72 in
Light dimensions	158 mm / 6.22 in
Material	Steel/Aluminum/AB2 on request
Heatsink	Aluminum 6082
Glass	Protective Tempered Clear Glass
Protection	Yes
Water Ingress Protection Rating	IP68
Light Cable Length	3mt / 9' 8" (Standard)

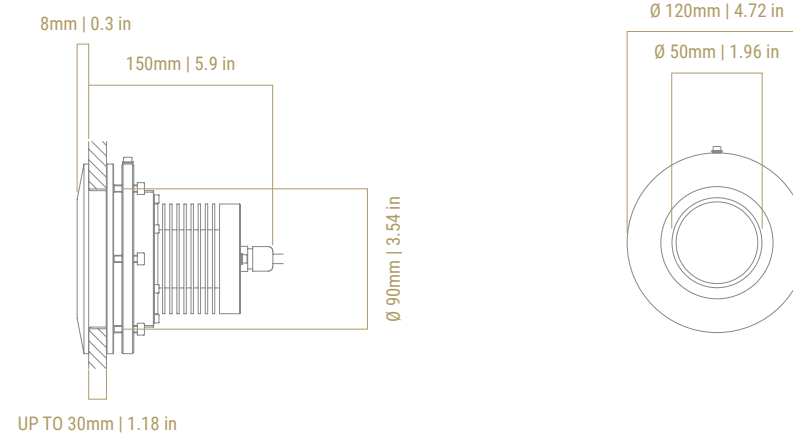

### STAINLESS STEEL AISI 316L

**Narrow Beam:** 90 SEALE WHITE 120 INC SS NB  
**Medium Beam:** 90 SEALE WHITE 120 INC SS MB

### DRIVER

for select your driver  
 choose on page: 66

### DIFFERENT BEAM SELECTION

